

**ENFORCEMENT**

**CAMERA**

**TOOLS**

**FIRE  
FIGHTING**

**MILITARY**

**PHOTOGRAPHY**

**OUTDOOR  
SPORT**



**MEDICAL**

**CAMPING**

**HUNTING**

**RAFTING**

**SHIPS**

**DIVING**

**RESCUE  
TEAMS**


**Protecting Your Value and Passion**



# Application

Dare Cases protective box is applicable to any extreme environment. It is durable, shatterproof, dust-proof, waterproof, anti-corroissive, impact resistant and etc.

## PHOTOGRAPHY

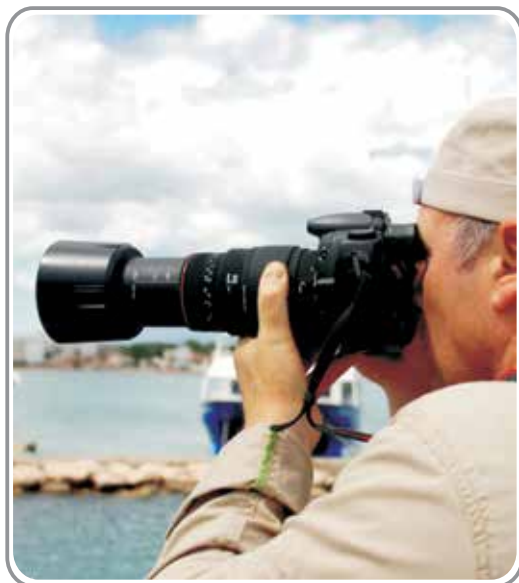

## MILITARY



These cases are specially designed to protect and transport your goods.

They are widely used to many different kinds of field.

Such as industrial, video broadcast, communication instrument, photographic, hunting, military, any outdoor activity and many more.

## ADVENTURE



## INSTRUMENT



# Features



- ①: Double throw latch
- ②: Lockhole for lock
- ③: Waterproof O-ring seal
- ④: Removable lids with stainless hinges
- ⑤: Stainless ball bearing
- ⑥: Comfortable rubber wrap handle
- ⑦: Pre-cubed foam
- ⑧: Waterproof and removable tag holder
- ⑨: Manual pressure release valve
- ⑩: Thickness: 6mm
- ⑪: Retractable and extension handle
- ⑫: Stackable



Open: ① + ②  
 Step 1: Press button together toward the middle  
 Step 2: Pull the handle upward



Close: ① + ③  
 Step 1: Press button together toward the middle  
 Step 2: Press the handle downward



Open: Pull the handle upward  
 Close: ① + ②  
 Step 1: Press toggles together toward two sides  
 Step 2: Make the handle downward





# Micro Cases



## DC-130803-SD



### Specifications:

|                              |                        |
|------------------------------|------------------------|
| External Dimensions [LxWxH]: | -                      |
| Internal Dimensions [LxWxH]: | 13,0cm x 9,0cm x 4,0cm |
| LID Depth:                   | -                      |
| Bottom Depth:                | -                      |
| Weight with Foam:            | 0.25kg                 |
| Weight without Foam:         | -                      |
| Buoyancy Maximum:            | -                      |
| Temperature Range:           | -23 ~ 93°C             |
| Water Proof:                 | IP x5                  |
| Material:                    | PC with rubber liner   |
| Volume:                      | 0.46l                  |
| Wheels:                      | -                      |

Certificates:



## DC-130904-MC



### Specifications:

|                              |                        |
|------------------------------|------------------------|
| External Dimensions [LxWxH]: | -                      |
| Internal Dimensions [LxWxH]: | 13,0cm x 9,0cm x 4,0cm |
| LID Depth:                   | -                      |
| Bottom Depth:                | -                      |
| Weight with Foam:            | 0.25kg                 |
| Weight without Foam:         | -                      |
| Buoyancy Maximum:            | -                      |
| Temperature Range:           | -23 ~ 93°C             |
| Water Proof:                 | IP 65                  |
| Material:                    | PC with rubber liner   |
| Volume:                      | 0.46l                  |
| Wheels:                      | -                      |

Certificates:



## DC-160705-MC



### Specifications:

|                              |                        |
|------------------------------|------------------------|
| External Dimensions [LxWxH]: | -                      |
| Internal Dimensions [LxWxH]: | 16,0cm x 7,0cm x 5,0cm |
| LID Depth:                   | -                      |
| Bottom Depth:                | -                      |
| Weight with Foam:            | 0.3kg                  |
| Weight without Foam:         | -                      |
| Buoyancy Maximum:            | -                      |
| Temperature Range:           | -23 ~ 93°C             |
| Water Proof:                 | IP 65                  |
| Material:                    | PC with rubber liner   |
| Volume:                      | 0.56l                  |
| Wheels:                      | -                      |

Certificates:



## DC-161004-MC



### Specifications:

|                              |                         |
|------------------------------|-------------------------|
| External Dimensions [LxWxH]: | -                       |
| Internal Dimensions [LxWxH]: | 16,0cm x 10,0cm x 4,0cm |
| LID Depth:                   | -                       |
| Bottom Depth:                | -                       |
| Weight with Foam:            | 0.35kg                  |
| Weight without Foam:         | -                       |
| Buoyancy Maximum:            | -                       |
| Temperature Range:           | -23 ~ 93°C              |
| Water Proof:                 | IP 65                   |
| Material:                    | PC with rubber liner    |
| Volume:                      | 0.64l                   |
| Wheels:                      | -                       |

Certificates:





## Micro Cases



### Specifications:

|                              |                         |
|------------------------------|-------------------------|
| External Dimensions [LxWxH]: | -                       |
| Internal Dimensions [LxWxH]: | 16,0cm x 10,0cm x 7,0cm |
| LID Depth:                   | -                       |
| Bottom Depth:                | -                       |
| Weight with Foam:            | 0.4kg                   |
| Weight without Foam:         | -                       |
| Buoyancy Maximum:            | -                       |
| Temperature Range:           | -23 ~ 93°C              |
| Water Proof:                 | IP 65                   |
| Material:                    | PC with rubber linner   |
| Volume:                      | 1.12l                   |
| Wheels:                      | -                       |

### DC-161007-MC



Certificates:



### Specifications:

|                              |                         |
|------------------------------|-------------------------|
| External Dimensions [LxWxH]: | -                       |
| Internal Dimensions [LxWxH]: | 21,0cm x 11,0cm x 6,0cm |
| LID Depth:                   | -                       |
| Bottom Depth:                | -                       |
| Weight with Foam:            | 0.45kg                  |
| Weight without Foam:         | -                       |
| Buoyancy Maximum:            | -                       |
| Temperature Range:           | -23 ~ 93°C              |
| Water Proof:                 | IP 65                   |
| Material:                    | PC with rubber linner   |
| Volume:                      | 1.38l                   |
| Wheels:                      | -                       |

### DC-211106-MC



Certificates:



### Specifications:

|                              |                         |
|------------------------------|-------------------------|
| External Dimensions [LxWxH]: | -                       |
| Internal Dimensions [LxWxH]: | 21,0cm x 13,0cm x 6,0cm |
| LID Depth:                   | -                       |
| Bottom Depth:                | -                       |
| Weight with Foam:            | 0.5kg                   |
| Weight without Foam:         | -                       |
| Buoyancy Maximum:            | -                       |
| Temperature Range:           | -23 ~ 93°C              |
| Water Proof:                 | IP 65                   |
| Material:                    | PC with rubber linner   |
| Volume:                      | 1.64l                   |
| Wheels:                      | -                       |

### DC-211306-MC



Certificates:



# Small Cases



## DC-171305



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 19,0cm x 17,0cm x 6,0cm      |
| Internal Dimensions [LxWxH]: | 17,1cm x 13,4cm x 4,7cm      |
| LID Depth:                   | 1,5cm                        |
| Bottom Depth:                | 3,2cm                        |
| Weight with Foam:            | 0,4kg                        |
| Weight without Foam:         | 0,3kg                        |
| Buoyancy Maximum:            | 1kg                          |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 1l                           |
| Wheels:                      | -                            |

Available Colors:



Certificates:



## DC-191208



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 25,0cm x 22,0cm x 10,2cm     |
| Internal Dimensions [LxWxH]: | 19,0cm x 12,0cm x 8,0cm      |
| LID Depth:                   | 1,7cm                        |
| Bottom Depth:                | 6,3cm                        |
| Weight with Foam:            | 1,08kg                       |
| Weight without Foam:         | 0,98kg                       |
| Buoyancy Maximum:            | 1,4kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 2l                           |
| Wheels:                      | -                            |

Available Colors:



Certificates:



## DC-191213



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 21,9cm x 18,3cm x 15,4cm     |
| Internal Dimensions [LxWxH]: | 19,3cm x 12,7cm x 13,5cm     |
| LID Depth:                   | 2cm                          |
| Bottom Depth:                | 11,5cm                       |
| Weight with Foam:            | 1,1kg                        |
| Weight without Foam:         | 1kg                          |
| Buoyancy Maximum:            | 2,69kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 2,88l                        |
| Wheels:                      | -                            |

Available Colors:



Certificates:







## Small Cases



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 21,9cm x 18,3cm x 15,4cm     |
| Internal Dimensions [LxWxH]: | 22,4cm x 16,2cm x 9,6cm      |
| LID Depth:                   | 2,1cm                        |
| Bottom Depth:                | 7,5cm                        |
| Weight with Foam:            | 1,13kg                       |
| Weight without Foam:         | 1,03kg                       |
| Buoyancy Maximum:            | 3,1kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 3,3l                         |
| Wheels:                      | -                            |

Available Colors:



Certificates:



DC-221609



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 25,5cm x 17,3cm x 20,6cm     |
| Internal Dimensions [LxWxH]: | 22,4cm x 16,0cm x 14,5cm     |
| LID Depth:                   | 2cm                          |
| Bottom Depth:                | 12,5cm                       |
| Weight with Foam:            | 1,3kg                        |
| Weight without Foam:         | 1,2kg                        |
| Buoyancy Maximum:            | 3,9kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 5l                           |
| Wheels:                      | -                            |


Available Colors:



Certificates:



DC-221614

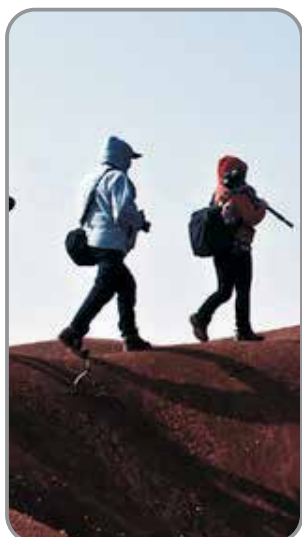

### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 27,0cm x 23,1cm x 18,5cm     |
| Internal Dimensions [LxWxH]: | 24,3cm x 18,2cm x 15,7cm     |
| LID Depth:                   | 3,15cm                       |
| Bottom Depth:                | 12,5cm                       |
| Weight with Foam:            | 1,4kg                        |
| Weight without Foam:         | 1,26kg                       |
| Buoyancy Maximum:            | 6,38kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 6,57l                        |
| Wheels:                      | -                            |

Available Colors:



Certificates:



DC-231815



## Small Cases



### DC-261722



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 28,6cm x 22,0cm x 26,3cm     |
| Internal Dimensions [LxWxH]: | 26,5cm x 17,1cm x 22,3cm     |
| LID Depth:                   | 2,5cm                        |
| Bottom Depth:                | 19,8cm                       |
| Weight with Foam:            | 1,8kg                        |
| Weight without Foam:         | 1,59kg                       |
| Buoyancy Maximum:            | 8,68kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 9,9l                         |
| Wheels:                      | -                            |

Available Colors:



Certificates:



### DC-272012



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 30,8cm x 26,9cm x 15,0cm     |
| Internal Dimensions [LxWxH]: | 28,0cm x 20,0cm x 12,2cm     |
| LID Depth:                   | 3,45cm                       |
| Bottom Depth:                | 8,8cm                        |
| Weight with Foam:            | 1,99kg                       |
| Weight without Foam:         | 1,88kg                       |
| Buoyancy Maximum:            | 6,16kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 6,44l                        |
| Wheels:                      | -                            |

Available Colors:



Certificates:



### DC-271017



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 28,5cm x 26,5cm x 20,0cm     |
| Internal Dimensions [LxWxH]: | 27,6cm x 20,0cm x 16,5cm     |
| LID Depth:                   | 3cm                          |
| Bottom Depth:                | 13,5cm                       |
| Weight with Foam:            | 2,4kg                        |
| Weight without Foam:         | 12,2kg                       |
| Buoyancy Maximum:            | 6,7kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 7l                           |
| Wheels:                      | -                            |

Available Colors:



Certificates:







## Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 33,0cm x 30,0cm x 16,0cm     |
| Internal Dimensions [LxWxH]: | 31,0cm x 24,0cm x 13,0cm     |
| LID Depth:                   | 3cm                          |
| Bottom Depth:                | 10cm                         |
| Weight with Foam:            | 2,25kg                       |
| Weight without Foam:         | 2,05kg                       |
| Buoyancy Maximum:            | 9,1kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 20,28l                       |
| Wheels:                      | -                            |

Available Colors:



Certificates:



DC-312413



DC-322505

## Specifications:

|                              |                         |
|------------------------------|-------------------------|
| External Dimensions [LxWxH]: | 33,0cm x 26,1cm x 4,9cm |
| Internal Dimensions [LxWxH]: | 31,4cm x 23,2cm x 4,0cm |
| LID Depth:                   | 2cm                     |
| Bottom Depth:                | 2cm                     |
| Weight with Foam:            | 1,05kg                  |
| Weight without Foam:         | 1kg                     |
| Buoyancy Maximum:            | 6,5kg                   |
| Temperature Range:           | -40 ~ 90°C              |
| Water Proof:                 | IP 67                   |
| Material:                    | ABS                     |
| Volume:                      | 5,69l                   |
| Wheels:                      | -                       |

Available Colors:



Certificates:



DC-332317

## Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 35,7cm x 29,3cm x 19,3cm     |
| Internal Dimensions [LxWxH]: | 32,7cm x 22,9cm x 17,0cm     |
| LID Depth:                   | 4,7cm                        |
| Bottom Depth:                | 12,3cm                       |
| Weight with Foam:            | 2,76kg                       |
| Weight without Foam:         | 2,55kg                       |
| Buoyancy Maximum:            | 9,49kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 12,73l                       |
| Wheels:                      | -                            |

Available Colors:



Certificates:



## Medium Cases



### DC-333517



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 36,3cm x 42,0cm x 19,8cm     |
| Internal Dimensions [LxWxH]: | 33,4cm x 34,7cm x 16,85cm    |
| LID Depth:                   | 6,55cm                       |
| Bottom Depth:                | 10,3cm                       |
| Weight with Foam:            | 3,78kg                       |
| Weight without Foam:         | 3,37kg                       |
| Buoyancy Maximum:            | 18,42kg                      |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 19,09l                       |
| Wheels:                      | -                            |

Available Colors:



Certificates:



### DC-382718



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 41,0cm x 34,2cm x 20,4cm     |
| Internal Dimensions [LxWxH]: | 38,0cm x 27,1cm x 17,85cm    |
| LID Depth:                   | 4,65cm                       |
| Bottom Depth:                | 13,2cm                       |
| Weight with Foam:            | 3,98kg                       |
| Weight without Foam:         | 3,58kg                       |
| Buoyancy Maximum:            | 17,4kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 17,9l                        |
| Wheels:                      | -                            |

Available Colors:



Certificates:



### DC-382323



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 40,1cm x 29,2cm x 27,0cm     |
| Internal Dimensions [LxWxH]: | 38,0cm x 23,0cm x 23,0cm     |
| LID Depth:                   | 5,5cm                        |
| Bottom Depth:                | 17,5cm                       |
| Weight with Foam:            | 3,5kg                        |
| Weight without Foam:         | 3,2kg                        |
| Buoyancy Maximum:            | 10kg                         |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 20,1l                        |
| Wheels:                      | -                            |

Available Colors:



Certificates:






# Medium Cases



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 45,0cm x 35,0cm x 16,0cm     |
| Internal Dimensions [LxWxH]: | 42,0cm x 29,4cm x 14,8cm     |
| LID Depth:                   | 5,1cm                        |
| Bottom Depth:                | 9,7cm                        |
| Weight with Foam:            | 2,2kg                        |
| Weight without Foam:         | 2,05kg                       |
| Buoyancy Maximum:            | 15kg                         |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 15l                          |
| Wheels:                      | -                            |

Available Colors:    

Certificates: 


DC-433015



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 46,5cm x 40,0cm x 35,0cm |
| Internal Dimensions [LxWxH]: | 44,0cm x 33,0cm x 33,0cm |
| LID Depth:                   | 4,7cm                    |
| Bottom Depth:                | 28,5cm                   |
| Weight with Foam:            | 3,45kg                   |
| Weight without Foam:         | 2,45kg                   |
| Buoyancy Maximum:            | 42,3kg                   |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | ABS                      |
| Volume:                      | 31l                      |
| Wheels:                      | -                        |

Available Colors:    

Certificates: 


DC-433333



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 47,9cm x 41,5cm x 15,0cm     |
| Internal Dimensions [LxWxH]: | 44,8cm x 34,5cm x 12,1cm     |
| LID Depth:                   | 4,7cm                        |
| Bottom Depth:                | 7,8cm                        |
| Weight with Foam:            | 4,34kg                       |
| Weight without Foam:         | 4,04kg                       |
| Buoyancy Maximum:            | 16,3kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 18,8l                        |
| Wheels:                      | -                            |

Available Colors:    

Certificates: 

DC-443412





## Medium Cases



### DC-443419



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 47,9cm x 41,5cm x 21,7cm     |
| Internal Dimensions [LxWxH]: | 44,8cm x 34,5cm x 18,6cm     |
| LID Depth:                   | 4,6cm                        |
| Bottom Depth:                | 14cm                         |
| Weight with Foam:            | 5,18kg                       |
| Weight without Foam:         | 4,74kg                       |
| Buoyancy Maximum:            | 26,8kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 28,5l                        |
| Wheels:                      | -                            |

Available Colors:



Certificates:



### DC-473321



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 50,0cm x 38,75cm x 25,4cm    |
| Internal Dimensions [LxWxH]: | 47,1cm x 33,1cm x 21,0cm     |
| LID Depth:                   | 4,5cm                        |
| Bottom Depth:                | 16,1cm                       |
| Weight with Foam:            | 4,57kg                       |
| Weight without Foam:         | 4,25kg                       |
| Buoyancy Maximum:            | 27,8kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 32,74l                       |
| Wheels:                      | Yes                          |

Available Colors:



Certificates:



### DC-483720



#### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 52,0cm x 43,5cm x 23,0cm     |
| Internal Dimensions [LxWxH]: | 48,0cm x 37,0cm x 20,5cm     |
| LID Depth:                   | 5cm                          |
| Bottom Depth:                | 15,5cm                       |
| Weight with Foam:            | 5,4kg                        |
| Weight without Foam:         | 4,64kg                       |
| Buoyancy Maximum:            | 19,5kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 36l                          |
| Wheels:                      | Yes                          |

Available Colors:



Certificates:



**Specifications:**

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 55,7cm x 34,8cm x 19,9cm     |
| Internal Dimensions [LxWxH]: | 52,6cm x 27,5cm x 16,95cm    |
| LID Depth:                   | 4,85cm                       |
| Bottom Depth:                | 12,1cm                       |
| Weight with Foam:            | 4,98kg                       |
| Weight without Foam:         | 4,48kg                       |
| Buoyancy Maximum:            | 19,5kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 25l                          |
| Wheels:                      | -                            |

Available Colors:

Certificates:



## Large Cases

**DC-512717****DC-512722****Specifications:**

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 55,7cm x 34,8cm x 24,8cm |
| Internal Dimensions [LxWxH]: | 52,1cm x 27,8cm x 19,0cm |
| LID Depth:                   | 4,9cm                    |
| Bottom Depth:                | 14,18cm                  |
| Weight with Foam:            | 7,6kg                    |
| Weight without Foam:         | 7kg                      |
| Buoyancy Maximum:            | 27,4kg                   |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | ABS                      |
| Volume:                      | 28,6l                    |
| Wheels:                      | Yes                      |

Available Colors:



Certificates:

**DC-544025****Specifications:**

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 61,0cm x 47,2cm x 27,5cm     |
| Internal Dimensions [LxWxH]: | 54,0cm x 40,2cm x 25,0cm     |
| LID Depth:                   | 5,5cm                        |
| Bottom Depth:                | 19,5cm                       |
| Weight with Foam:            | 10,5kg                       |
| Weight without Foam:         | 9,3kg                        |
| Buoyancy Maximum:            | 54kg                         |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 54l                          |
| Wheels:                      | Yes                          |

Available Colors:



Certificates:



# Large Cases



## DC-584433



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 67,0cm x 50,8cm x 35,5cm     |
| Internal Dimensions [LxWxH]: | 58,4cm x 44,2cm x 32,9cm     |
| LID Depth:                   | 5,6cm                        |
| Bottom Depth:                | 27,3cm                       |
| Weight with Foam:            | 10,92kg                      |
| Weight without Foam:         | 9,3kg                        |
| Buoyancy Maximum:            | 82,3kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 82,2l                        |
| Wheels:                      | Yes                          |

Available Colors:



Certificates:



## DC-764830



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 85,1cm x 56,0cm x 33,1cm     |
| Internal Dimensions [LxWxH]: | 76,3cm x 48,3cm x 30,2cm     |
| LID Depth:                   | 7,5cm                        |
| Bottom Depth:                | 22,5cm                       |
| Weight with Foam:            | 12kg                         |
| Weight without Foam:         | 9,9kg                        |
| Buoyancy Maximum:            | 120kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 120l                         |
| Wheels:                      | Yes                          |

Available Colors:



Certificates:



## DC-764840



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 85,1cm x 55,6cm x 42,9cm     |
| Internal Dimensions [LxWxH]: | 76,3cm x 48,3cm x 40,2cm     |
| LID Depth:                   | 7,6cm                        |
| Bottom Depth:                | 32,6cm                       |
| Weight with Foam:            | 16,67kg                      |
| Weight without Foam:         | 13,81kg                      |
| Buoyancy Maximum:            | 143kg                        |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 145,84l                      |
| Wheels:                      | Yes                          |


Available Colors:



Certificates:



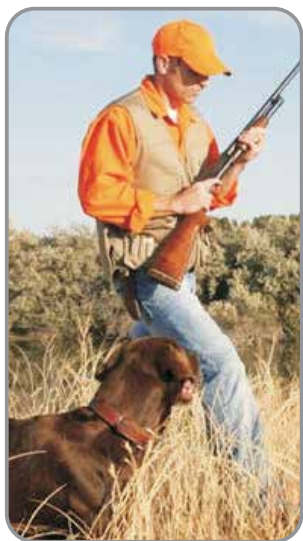

**Specifications:**

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 88,0cm x 34,0cm x 12,4cm |
| Internal Dimensions [LxWxH]: | 86,5cm x 30,0cm x 12,4cm |
| LID Depth:                   | 6,2cm                    |
| Bottom Depth:                | 6,2cm                    |
| Weight with Foam:            | 3,25kg                   |
| Weight without Foam:         | 3,2kg                    |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -10 ~ 60°C               |
| Water Proof:                 | -                        |
| Material:                    | Engineering PP           |
| Volume:                      | 24,48l                   |
| Wheels:                      | -                        |


Available Colors:



Certificates:



## Gun Cases

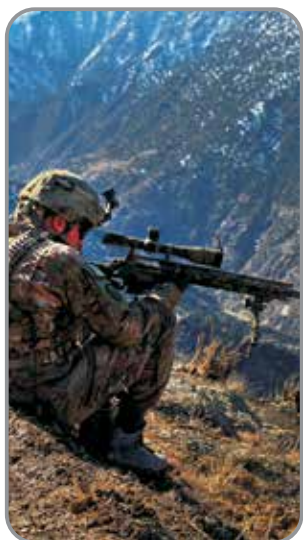
**DC-B85****DC-B120****Specifications:**

|                              |                           |
|------------------------------|---------------------------|
| External Dimensions [LxWxH]: | 123,0cm x 26,5cm x 11,0cm |
| Internal Dimensions [LxWxH]: | 121,0cm x 22,8cm x 10,2cm |
| LID Depth:                   | 5cm                       |
| Bottom Depth:                | 5cm                       |
| Weight with Foam:            | 2,8kg                     |
| Weight without Foam:         | 2,65kg                    |
| Buoyancy Maximum:            | -                         |
| Temperature Range:           | -10 ~ 60°C                |
| Water Proof:                 | -                         |
| Material:                    | Engineering PP            |
| Volume:                      | 25,54l                    |
| Wheels:                      | -                         |

Available Colors:



Certificates:

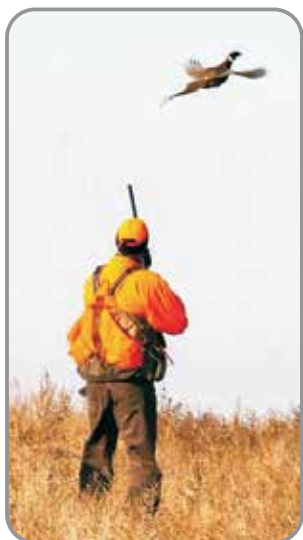**DC-B136****Specifications:**

|                              |                           |
|------------------------------|---------------------------|
| External Dimensions [LxWxH]: | 140,0cm x 33,0cm x 14,0cm |
| Internal Dimensions [LxWxH]: | 137,0cm x 30,0cm x 13,0cm |
| LID Depth:                   | 6,5cm                     |
| Bottom Depth:                | 6,5cm                     |
| Weight with Foam:            | 3,9kg                     |
| Weight without Foam:         | 3,85kg                    |
| Buoyancy Maximum:            | -                         |
| Temperature Range:           | -10 ~ 60°C                |
| Water Proof:                 | -                         |
| Material:                    | Engineering PP            |
| Volume:                      | 40,8l                     |
| Wheels:                      | -                         |

Available Colors:



Certificates:



# Gun Cases



## DC-312508



### Specifications:

|                              |                         |
|------------------------------|-------------------------|
| External Dimensions [LxWxH]: | 31,0cm x 24,9cm x 8,0cm |
| Internal Dimensions [LxWxH]: | 30,4cm x 19,2cm x 7,1cm |
| LID Depth:                   | 3,4cm                   |
| Bottom Depth:                | 3,7cm                   |
| Weight with Foam:            | 0,89kg                  |
| Weight without Foam:         | 0,8kg                   |
| Buoyancy Maximum:            | -                       |
| Temperature Range:           | -10 ~ 60°C              |
| Water Proof:                 | -                       |
| Material:                    | Engineering PP          |
| Volume:                      | 4,14l                   |
| Wheels:                      | -                       |

Available Colors:



Certificates:



## DC-1023313



### Specifications:

|                              |                           |
|------------------------------|---------------------------|
| External Dimensions [LxWxH]: | 103,0cm x 33,0cm x 15,0cm |
| Internal Dimensions [LxWxH]: | 98,0cm x 29,0cm x 12,5cm  |
| LID Depth:                   | 3cm                       |
| Bottom Depth:                | 9,5cm                     |
| Weight with Foam:            | 7kg                       |
| Weight without Foam:         | 6,6kg                     |
| Buoyancy Maximum:            | -                         |
| Temperature Range:           | -40 ~ 90°C                |
| Water Proof:                 | IP 67                     |
| Material:                    | Engineering PP            |
| Volume:                      | 35,53l                    |
| Wheels:                      | -                         |

Available Colors:



Certificates:



## DC-1133513



### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 118,9cm x 40,5cm x 16,0cm    |
| Internal Dimensions [LxWxH]: | 113,8cm x 35,1cm x 13,3cm    |
| LID Depth:                   | 4cm                          |
| Bottom Depth:                | 9,3cm                        |
| Weight with Foam:            | 9,35kg                       |
| Weight without Foam:         | 8,71kg                       |
| Buoyancy Maximum:            | 52,8kg                       |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 56,76l                       |
| Wheels:                      | -                            |

Available Colors:



Certificates:





## Gun Cases

DC-1222311

### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 125,2cm x 29,4cm x 13,0cm    |
| Internal Dimensions [LxWxH]: | 122,0cm x 23,0cm x 11cm      |
| LID Depth:                   | 3,5cm                        |
| Bottom Depth:                | 7,5cm                        |
| Weight with Foam:            | 6kg                          |
| Weight without Foam:         | 5,5kg                        |
| Buoyancy Maximum:            | -                            |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 30,87l                       |
| Wheels:                      | -                            |

Available Colors:



Certificates:



DC-1303214

### Specifications:

|                              |                              |
|------------------------------|------------------------------|
| External Dimensions [LxWxH]: | 138,8cm x 39,4cm x 15,2cm    |
| Internal Dimensions [LxWxH]: | 130,8cm x 32,1cm x 13,2cm    |
| LID Depth:                   | 5cm                          |
| Bottom Depth:                | 8,3cm                        |
| Weight with Foam:            | 8,9kg                        |
| Weight without Foam:         | 8,5kg                        |
| Buoyancy Maximum:            | -                            |
| Temperature Range:           | -40 ~ 90°C                   |
| Water Proof:                 | IP 67                        |
| Material:                    | Engineer Resin + Glass fiber |
| Volume:                      | 55,52l                       |
| Wheels:                      | -                            |

Available Colors:



Certificates:





# Transport Boxes



## DC-T312824



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 40,3cm x 37,3cm x 26,0cm |
| Internal Dimensions [LxWxH]: | 31,5cm x 28,5cm x 22,5cm |
| LID Depth:                   | 4,1cm                    |
| Bottom Depth:                | 18,4cm                   |
| Weight with Foam:            | 8kg                      |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 20,2l                    |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T392914



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 47,8cm x 37,8cm x 17,3cm |
| Internal Dimensions [LxWxH]: | 39,0cm x 29,0cm x 14,5cm |
| LID Depth:                   | 5,4cm                    |
| Bottom Depth:                | 9,2cm                    |
| Weight with Foam:            | 4,1kg                    |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 16,4l                    |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T422815



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 50,8cm x 37,2cm x 17,7cm |
| Internal Dimensions [LxWxH]: | 42,0cm x 28,5cm x 15,0cm |
| LID Depth:                   | 4,8cm                    |
| Bottom Depth:                | 10,2cm                   |
| Weight with Foam:            | 5,3kg                    |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 18l                      |
| Wheels:                      | -                        |

Available Colors:



Certificates:





# Transport Boxes

## DC-T493231

### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 58,0cm x 41,0cm x 35,0cm |
| Internal Dimensions [LxWxH]: | 49,2cm x 32,2cm x 31,5cm |
| LID Depth:                   | 4,1cm                    |
| Bottom Depth:                | 27,4cm                   |
| Weight with Foam:            | 7,8kg                    |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -10 ~ 60°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 49,9l                    |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T523622

### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 62,4cm x 44,8cm x 24,5cm |
| Internal Dimensions [LxWxH]: | 52,0cm x 36,0cm x 20,2cm |
| LID Depth:                   | 6,5cm                    |
| Bottom Depth:                | 13,7cm                   |
| Weight with Foam:            | 8,1kg                    |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -10 ~ 60°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 37,8l                    |
| Wheels:                      | Yes                      |

Available Colors:



Certificates:



## DC-T534338

### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 61,8cm x 51,8cm x 41,0cm |
| Internal Dimensions [LxWxH]: | 53,0cm x 43,0cm x 36,9cm |
| LID Depth:                   | 10,3cm                   |
| Bottom Depth:                | 26,6cm                   |
| Weight with Foam:            | 10,1kg                   |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -10 ~ 60°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 84,1l                    |
| Wheels:                      | -                        |

Available Colors:



Certificates:



# Transport Boxes



## DC-T724832



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 80,3cm x 57,3cm x 35,3cm |
| Internal Dimensions [LxWxH]: | 71,5cm x 48,5cm x 32,0cm |
| LID Depth:                   | 6,8cm                    |
| Bottom Depth:                | 25,2cm                   |
| Weight with Foam:            | 17,1kg                   |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 111l                     |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T735340



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 81,8cm x 61,8cm x 44,5cm |
| Internal Dimensions [LxWxH]: | 73,1cm x 53,1cm x 40,4cm |
| LID Depth:                   | 5,8cm                    |
| Bottom Depth:                | 34,6cm                   |
| Weight with Foam:            | 25,2kg                   |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 156,8l                   |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T764646



### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 81,4cm x 51,0cm x 50,1cm |
| Internal Dimensions [LxWxH]: | 76,2cm x 46,3cm x 46,2cm |
| LID Depth:                   | 4,9cm                    |
| Bottom Depth:                | 41,3cm                   |
| Weight with Foam:            | 23kg                     |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -40 ~ 90°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 163l                     |
| Wheels:                      | -                        |

Available Colors:



Certificates:







# Transport Boxes

## DC-T796746

### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 87,8cm x 75,8cm x 50,0cm |
| Internal Dimensions [LxWxH]: | 79,0cm x 67,0cm x 45,8cm |
| LID Depth:                   | 9,2cm                    |
| Bottom Depth:                | 36,6cm                   |
| Weight with Foam:            | 26,1kg                   |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -10 ~ 60°C               |
| Water Proof:                 | -                        |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 242,4l                   |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T804633

### Specifications:

|                              |                          |
|------------------------------|--------------------------|
| External Dimensions [LxWxH]: | 88,8cm x 54,8cm x 36,5cm |
| Internal Dimensions [LxWxH]: | 80,0cm x 46,0cm x 32,4cm |
| LID Depth:                   | 5,8cm                    |
| Bottom Depth:                | 26,6cm                   |
| Weight with Foam:            | 25kg                     |
| Weight without Foam:         | -                        |
| Buoyancy Maximum:            | -                        |
| Temperature Range:           | -10 ~ 60°C               |
| Water Proof:                 | IP 67                    |
| Material:                    | Poly Ethylene Plastic    |
| Volume:                      | 119,2l                   |
| Wheels:                      | -                        |

Available Colors:



Certificates:



## DC-T1127254

### Specifications:

|                              |                           |
|------------------------------|---------------------------|
| External Dimensions [LxWxH]: | 120,8cm x 80,3cm x 57,5cm |
| Internal Dimensions [LxWxH]: | 112,4cm x 71,9cm x 53,4cm |
| LID Depth:                   | 10,8cm                    |
| Bottom Depth:                | 42,6cm                    |
| Weight with Foam:            | 33,1kg                    |
| Weight without Foam:         | -                         |
| Buoyancy Maximum:            | -                         |
| Temperature Range:           | -10 ~ 60°C                |
| Water Proof:                 | -                         |
| Material:                    | Poly Ethylene Plastic     |
| Volume:                      | 431,6l                    |
| Wheels:                      | -                         |

Available Colors:



Certificates:



## Transport Boxes





## Dry & Ammo Boxes

### Specifications:

|                     |   |
|---------------------|---|
| Dimensions [LxWxH]: | 37cm x 21cm x 23,5cm / 33,5cm x 20cm x 33,0cm |
| Colors:             | Black & Yellow                                |
| Weight:             | 1,25kg / 1,5kg                                |
| Material:           | Engineering Polypropylene Plastic             |

Durable handle and heavy duty latch  
Strong mechanical hinge  
Designed for stacking  
Easily handle over 30 pounds of gear  
Perfect for ammo and tools



DC-TB901 / DC-TB901-L



DC-TB902

### Specifications:

|                     |                                   |
|---------------------|-----------------------------------|
| Dimensions [LxWxH]: | 61,5cm x 29,0cm x 20,0cm          |
| Colors:             | Black & Yellow                    |
| Weight:             | 2,55kg                            |
| Material:           | Engineering Polypropylene Plastic |



DC-TB903

### Specifications:

|                     |  |
|---------------------|--|
| Dimensions [LxWxH]: | 12,0cm x 6,0cm x 7,5cm   |
| Colors:             | Blue   |
| Weight:             | 0,1kg  |
| Material:           | Engineering Polypropylene Plastic  |
| Round:              | 50   |
| Calibers Fit In:    | 17 Fireball, 17 / 221 / 223 Rem., 223 Rem. HP,<br>17 MACH 4, 204 Ruger, 222 Rem. Mag., 300 Sherwood, 300 Whisper, 32 Ideal, 32 Win.<br>S.L., 6mm-223 Rem., 6 x 47<br>Max. OAL= 2.65" |





# Dry & Ammo Boxes



## DC-TB904



### Specifications:

|                     |   |
|---------------------|---|
| Dimensions [LxWxH]: | 19,0cm x 19,0cm x 11,5cm  |
| Colors:             | Green   |
| Weight:             | 0,45kg  |
| Material:           | Engineering Polypropylene Plastic   |
| Round:              | 100   |
| Calibers Fit In:    | 22BR / 22 Cheetah, 22 PPC, 22 Sav. HP, 220 Rus., 220 Swift, 22-250 Rem., 224 Wby. Mag., 224 Clark, 225 / 243 / 270 / 284 / 307 / 308 / 356 / 6mm-284 Win., 250 Sav., 25 / 25-06 / 30 / 35 Rem., 25-35 WCF, 25-284 Win., 28-30 Sevens, 30 T/C, 300 / 303 Sav., 30-06 Spr., 30-30 Win., 30-40 Krag., 308 Marlin Exp., 32-40 Win., 32 / 401 Win. S.L., 32 Win. Spl., 338 Fed., 35 Whelen, 376 Steyr, 38-55 Win., 360 Nitro Exp. 2 1/4", 375 Rimless 2 1/4", 400-375 Belted Nitro Exp., 5.6 x 5 2 Rimmed, 6.5 Carcano, 6.5 Creedmoor, 6.5-284 LAPUA, 6.5x50 Jap. Arisaka, 6.5x52 Italian, 6.5x 54mm Mann-Schoen., 6.5x55mm Swedish, 6.5x 257 Roberts, 6.5-284 Norma, 6.8mm Rem.Spl. 6mm BR-DX, 6mm Norma BR, 8mm Rem. Spl., 6mm PPC USA, 6mm Rem., 7.35 Carcano, 7.5x 54 French MAS., 7.5x55 Swiss, 65x53 Mauser, 7.7 Jap., 7.7x58 Jap., 7mm BR, 7mm-08 Rem., 8x57J, 9x57 Norma, 9.3x74, 10.75x68 Mauser 410 Shotshells |



## DC-TB905



### Specifications:

|                     |   |
|---------------------|---|
| Dimensions [LxWxH]: | 12,0cm x 12,0cm x 4,5cm   |
| Colors:             | Blue  |
| Weight:             | 0,1kg   |
| Material:           | Engineering Polypropylene Plastic   |
| Round:              | 50  |
| Calibers Fit In:    | 17 Fireball, 17 / 221 / 223 Rem., 223 Rem. HP, 17 MACH 4, 204 Ruger, 222 Rem. Mag., 300 Sherwood, 300 Whisper, 32 Ideal, 32 Win. S.L., 6mm-223 Rem., 6 x 47 Max. OAL= 2.65" |



## DC-TB906



### Specifications:

|                     |                                     |
|---------------------|-------------------------------------|
| Dimensions [LxWxH]: | 12,0cm x 12,0cm x 3,5cm             |
| Colors:             | Blue                                |
| Weight:             | 0,1kg                               |
| Material:           | Engineering Polypropylene Plastic   |
| Round:              | 100                                 |
| Calibers Fit In:    | 9mm, 380 ACP, 30 Luger, 9mm Makarov |
| Max. OAL =          | 1.22"                               |



## Dry & Ammo Boxes

### Specifications:

|                     |  |
|---------------------|--|
| Dimensions [LxWxH]: | 12,0cm x 12,0cm x 7,0cm  |
| Colors:             | Blue   |
| Weight:             | 0,2kg  |
| Material:           | Engineering Polypropylene Plastic  |
| Round:              | 100  |
| Calibers Fit In:    | 17 Fireball, 17 / 221 / 223 Rem., 204 Ruger, 222 Rem. Mag., 223 Rem. HP, 300 Sherwood, 300 Whisper, 32 Ideal, 6mm TCU, 6mm-223 Rem |
| Max. OAL=           | 2.65"  |

### DC-TB907



### DC-TB908

### Specifications:

|                     |   |
|---------------------|---|
| Dimensions [LxWxH]: | 15,5cm x 8,0cm x 8,0cm  |
| Colors:             | Blue  |
| Weight:             | 0,2kg   |
| Material:           | Engineering Polypropylene Plastic   |
| Round:              | 50  |
| Calibers Fit In:    | 220 Swift, 300 Sav., 338 RCM, 225 / 243 / 307 / 308 Win., 338 Fed., 25 / 32 / 6mm Rem., 28-30 Sevens, 30 Rem. AR, 360 Nitro Express 2 1/4", 5.6 x 52 Rimmed, 6.5 Creedmoor, 6.5x 50 Jap Arisaka, 6mm-284 Win., 7.35 Carcano, 7.5 x 54 French MAS, 7.65 x 53 Mauser, 7mmTCU, 7mm-08 Rem. |
| Max. OAL=           | 3.04"   |



### DC-TB909

### Specifications:

|                     |  |
|---------------------|--|
| Dimensions [LxWxH]: | 15,5cm x 8,0cm x 9,5cm   |
| Colors:             | Blue   |
| Weight:             | 0,2kg  |
| Material:           | Engineering Polypropylene Plastic  |
| Round:              | 50   |
| Calibers Fit In:    | 224 Clark, 240 Wby. Mag., 257 Roberts, 270 Win., 25-06 / 280 Rem., 30 Gibbs, 30-06 Spr., 318 Westley Richards, 338-06 A-Square, 35 Whelen, 375 Rimless 2 1/4", 6.5 Carcano, 6.5x257 Roberts, 6.5-06 A-Square, 6.5x54mm Mann-Schone, 6.5x 55 Swedish, 7x 64 Brenneke, 7x72 Rimmed, 7x57 / 9.3x57mm Mauser, 8x57J, 7.7 Jap, 7.7x58 Jap., 8mm-06, 9.3x62, 9.3x74. .410 Shotshells upto 3" |
| Max. OAL=           | 3.61"  |



# Dry & Ammo Boxes



## DC-TB910 / DC-TB910-S



### Specifications:

|                     |   |
|---------------------|---|
| Dimensions [LxWxH]: | 35cm x 20cm x 34cm / 33,5cm x 21cm x 25,5cm |
| Colors:             | Black & Yellow                              |
| Weight:             | 1,9kg / 1,7kg                               |
| Material:           | Engineering Polypropylene Plastic           |

Five section lid compartment for small tools  
Full size lift out tray  
Sick sidewall construction  
Double padlock tabs  
Large comfortable handle

## DC-TB911



### Specifications:

|                     |                                   |
|---------------------|-----------------------------------|
| Dimensions [LxWxH]: | 34,3cm x 19,5cm x 14,0cm          |
| Colors:             | Army Green & Orange               |
| Weight:             | 0,62kg                            |
| Material:           | Engineering Polypropylene Plastic |

## DC-TB912



### Specifications:

|                     |                                   |
|---------------------|-----------------------------------|
| Dimensions [LxWxH]: | 22,1cm x 13,5cm x 12,0cm          |
| Colors:             | Army Green & Orange               |
| Weight:             | 0,38kg                            |
| Material:           | Engineering Polypropylene Plastic |






# Field Desk

DC-S0055

**Specifications:**

|                              |                                  |
|------------------------------|----------------------------------|
| External Dimensions [LxWxH]: | 192,0cm x 50,0cm x 72,5cm        |
| Internal Dimensions [LxWxH]: | 64,0 x 53,0 x 72,5cm             |
| LID Depth:                   | -                                |
| Bottom Depth:                | -                                |
| Weight with Foam:            | 35,58kg                          |
| Weight without Foam:         | -                                |
| Buoyancy Maximum:            | -                                |
| Temperature Range:           | -10 ~ 90°C                       |
| Water Proof:                 | -                                |
| Material:                    | Engineering PP + Stainless steel |
| Volume:                      | -                                |
| Wheels:                      | -                                |

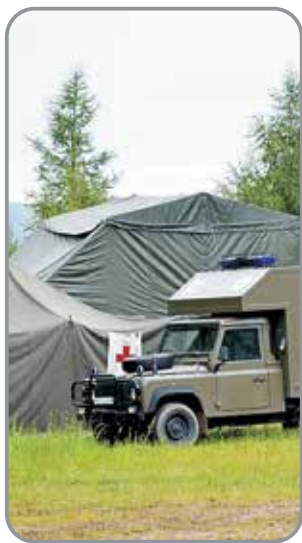

Available Colors:



Certificates:



# Cases Overview



| CASE                        | EXTERIOR<br>[ L x W x H ] | INTERIOR<br>[ L x W x H ] | LID<br>DEPTH | BOTTOM<br>DEPTH | WEIGHT<br>WITH<br>FOAM | WEIGHT<br>WITHOUT<br>FOAM | BUOYANCY<br>MAXIMUM | TEMP.<br>RANGE | WATER<br>PROOF | Material                          | Volume  | Wheels |
|-----------------------------|---------------------------|---------------------------|--------------|-----------------|------------------------|---------------------------|---------------------|----------------|----------------|-----------------------------------|---------|--------|
| <b>MICRO CASES</b>          |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-130803                   | 12,75 x 8,08 x 1,32cm     | 8,92 x 6,85 x 0,98cm      | 0,49cm       | 0,49cm          | 0,105kg                | -                         | -                   | -40/90°C       | IP x5          | PC with rubber liner              | 0,06l   | -      |
| DC-130904                   | 17,0 x 12,0 x 4,5cm       | 13,0 x 9,0 x 4,0cm        | 1,5cm        | 2,5cm           | 0,25kg                 | -                         | -                   | -23/93°C       | IP 65          | PC with rubber liner              | 0,46l   | -      |
| DC-160705                   | 19,5 x 10,0 x 5,5cm       | 16,0 x 7,0 x 5,0cm        | 2,0cm        | 3cm             | 0,3kg                  | -                         | -                   | -23/93°C       | IP 65          | PC with rubber liner              | 0,56l   | -      |
| DC-161004                   | 19,5 x 13,0 x 4,5cm       | 16,0 x 10,0 x 4,0cm       | 1,5cm        | 2,5cm           | 0,35kg                 | -                         | -                   | -23/93°C       | IP 65          | PC with rubber liner              | 0,64l   | -      |
| DC-161007                   | 19,5 x 13,0 x 7,5cm       | 16,0 x 10,0 x 7,0cm       | 2cm          | 5cm             | 0,4kg                  | -                         | -                   | -23/93°C       | IP 65          | PC with rubber liner              | 1,12l   | -      |
| DC-211106                   | 25,0 x 14,0 x 6,5cm       | 21,0 x 11,0 x 6,0cm       | 2cm          | 4cm             | 0,45kg                 | -                         | -                   | -23/93°C       | IP 65          | PC with rubber liner              | 1,38l   | -      |
| DC-211306                   | 25,0 x 16,0 x 6,5cm       | 21,0 x 13,0 x 6,0cm       | 2cm          | 4cm             | 0,5kg                  | -                         | -                   | -23/93°C       | IP 65          | PC with rubber liner              | 1,64l   | -      |
| <b>SMALL CASES</b>          |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-171305                   | 19,0 x 17,0 x 6,0 cm      | 17,1 x 13,4 x 4,7cm       | 1,5cm        | 3,2cm           | 0,4kg                  | 0,3kg                     | 1kg                 | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 1l      | -      |
| DC-191208                   | 25,0 x 22,0 x 10,2cm      | 19,0 x 12,0 x 8,0cm       | 1,7cm        | 6,3cm           | 1,08kg                 | 0,98kg                    | 1,4kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 2l      | -      |
| DC-191213                   | 21,9 x 18,3 x 15,4cm      | 19,3 x 12,7 x 13,5cm      | 2cm          | 11,5cm          | 1,1kg                  | 1kg                       | 2,69kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 2,88l   | -      |
| DC-221609                   | 21,9 x 18,3 x 15,4cm      | 22,4 x 16,2 x 9,6cm       | 2,1cm        | 7,5cm           | 1,13kg                 | 1,03kg                    | 3,1kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 3,3l    | -      |
| DC-231614                   | 25,5 x 17,3 x 20,6cm      | 22,4 x 16,7 x 14,5cm      | 2cm          | 12,5cm          | 1,3kg                  | 1,2kg                     | 3,9kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 5l      | -      |
| DC-231815                   | 27,0 x 23,1 x 18,5cm      | 24,3 x 18,2 x 15,7cm      | 3,15cm       | 12,5cm          | 1,4kg                  | 1,26kg                    | 6,38kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 6,57l   | -      |
| DC-261722                   | 28,6 x 22,0 x 26,3cm      | 26,5 x 17,1 x 22,3cm      | 2,5cm        | 19,8cm          | 1,8kg                  | 1,59kg                    | 8,68kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 9,9l    | -      |
| DC-272012                   | 30,8 x 26,9 x 15,0cm      | 28,0 x 20,0 x 12,2cm      | 3,45cm       | 8,8cm           | 1,99kg                 | 1,88kg                    | 6,16kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 6,44l   | -      |
| DC-272017                   | 28,5 x 26,5 x 20,0cm      | 27,6 x 20,0 x 16,5cm      | 3cm          | 13,5cm          | 2,4kg                  | 2,2kg                     | 6,7kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 7l      | -      |
| <b>MEDIUM CASES</b>         |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-312413                   | 33,0 x 30,0 x 16,0cm      | 31,0 x 24,0 x 13,0cm      | 3cm          | 10cm            | 2,25kg                 | 2,05kg                    | 9,1kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 20,28l  | -      |
| DC-322505                   | 33,0 x 26,1 x 4,9cm       | 31,4 x 23,2 x 4,0cm       | 2cm          | 2cm             | 1,05kg                 | 1kg                       | 6,5kg               | -20/90°C       | IP 65          | ABS                               | 5,69l   | -      |
| DC-332317                   | 35,7 x 29,3 x 19,3cm      | 32,7 x 22,9 x 17,0cm      | 4,7cm        | 12,3cm          | 2,76kg                 | 2,55kg                    | 9,49kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 12,73l  | -      |
| DC-333517                   | 36,3 x 42,0 x 19,8cm      | 33,4 x 34,7 x 16,85cm     | 6,55cm       | 10,3cm          | 3,78kg                 | 3,37kg                    | 18,42kg             | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 19,09l  | -      |
| DC-382718                   | 41,0 x 34,2 x 20,4cm      | 38,0 x 27,1 x 17,85cm     | 4,65cm       | 13,2cm          | 3,98kg                 | 3,58kg                    | 17,4kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 17,9l   | -      |
| DC-382323                   | 40,1 x 29,2 x 27,0cm      | 38,0 x 23,0 x 23,0cm      | 5,5cm        | 17,5cm          | 3,5kg                  | 3,2kg                     | 10kg                | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 20,1l   | -      |
| DC-433015                   | 45,0 x 35,0 x 16,0cm      | 42,0 x 29,4 x 14,8cm      | 5,1cm        | 9,7cm           | 2,2kg                  | 2,05kg                    | 15kg                | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 15l     | -      |
| DC-433333                   | 46,5 x 40,0 x 35,0cm      | 44,0 x 33,0 x 33,0cm      | 4,7cm        | 28,5cm          | 3,45kg                 | 2,45kg                    | 42,3kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 31l     | -      |
| DC-443412                   | 47,9 x 41,5 x 15,0cm      | 44,8 x 34,5 x 12,1cm      | 4,7cm        | 7,8cm           | 4,34kg                 | 4,04kg                    | 16,3kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 18,8l   | -      |
| DC-443419                   | 47,9 x 41,5 x 21,7cm      | 44,8 x 34,5 x 18,6cm      | 4,6cm        | 14cm            | 5,18kg                 | 4,74kg                    | 26,8kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 28,5l   | -      |
| DC-473321                   | 50,0 x 38,75 x 25,4cm     | 47,1 x 33,1 x 21,0cm      | 4,5cm        | 16,1cm          | 4,57kg                 | 4,25kg                    | 27,8kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 32,74l  | ✓      |
| DC-483720                   | 52,0 x 43,5 x 23,0cm      | 48,0 x 37,0 x 20,5cm      | 5cm          | 15,5cm          | 5,4kg                  | 4,64kg                    | 19,5kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 36l     | ✓      |
| <b>LARGE CASES</b>          |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-512717                   | 55,7 x 34,8 x 19,9cm      | 52,6 x 27,5 x 16,95cm     | 4,85cm       | 12,1cm          | 4,98kg                 | 4,48kg                    | 19,5kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 25l     | -      |
| DC-512722                   | 55,7 x 34,8 x 24,8cm      | 52,1 x 27,8 x 19,0cm      | 4,9cm        | 14,18cm         | 7,6kg                  | 7kg                       | 27,4kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 28,6l   | ✓      |
| DC-544025                   | 61,0 x 47,2 x 27,5cm      | 54,0 x 40,2 x 25,0cm      | 5,5cm        | 19,5cm          | 10,5kg                 | 9,3kg                     | 54kg                | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 54l     | ✓      |
| DC-584433                   | 67,0 x 50,8 x 35,5cm      | 58,4 x 44,2 x 32,9cm      | 5,6cm        | 27,3cm          | 10,92kg                | 9,3kg                     | 83,2kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 82,2l   | ✓      |
| DC-764830                   | 85,1 x 56,0 x 33,1cm      | 76,3 x 48,3 x 30,2cm      | 7,5cm        | 22,5cm          | 12kg                   | 9,9kg                     | 120kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 120l    | ✓      |
| DC-764840                   | 85,1 x 55,6 x 42,9cm      | 76,3 x 48,3 x 40,2cm      | 7,6cm        | 32,6cm          | 16,67kg                | 13,81kg                   | 143kg               | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 145,84l | ✓      |
| <b>GUN CASE</b>             |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-B85                      | 88,0 x 34,0 x 12,4cm      | 86,5 x 30,0 x 12,4cm      | 6,2cm        | 6,2cm           | 3,25kg                 | 3,2kg                     | -                   | -10/60°C       | -              | Engineering PP                    | 24,48   | -      |
| DC-B120                     | 123,0 x 26,5 x 11,0cm     | 121,0 x 22,8 x 10,2cm     | 5cm          | 5cm             | 2,8kg                  | 2,65kg                    | -                   | -10/60°C       | -              | Engineering PP                    | 25,54l  | -      |
| DC-B136                     | 140,0 x 33,0 x 14,0cm     | 137,0 x 30,0 x 13,0cm     | 6,5cm        | 6,5cm           | 3,9kg                  | 3,85kg                    | -                   | -10/60°C       | -              | Engineering PP                    | 40,8l   | -      |
| DC-312508                   | 31,0 x 24,9 x 8,0cm       | 30,4 x 19,2 x 7,1cm       | 3,4cm        | 3,7cm           | 0,85kg                 | 0,8kg                     | -                   | -10/60°C       | -              | Engineering PP                    | 4,14l   | -      |
| DC-1023313                  | 103,0 x 33,0 x 15,0cm     | 98,0 x 29,0 x 12,5cm      | 3cm          | 9,5cm           | 7kg                    | 6,6kg                     | -                   | -40/90°C       | IP 67          | Engineering PP                    | 35,53l  | -      |
| DC-1133513                  | 118,9 x 40,5 x 16,0cm     | 113,8 x 35,1 x 13,3cm     | 4cm          | 9,3cm           | 9,35kg                 | 8,71kg                    | 52,8kg              | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 56,76l  | ✓      |
| DC-1223311                  | 125,2 x 29,4 x 13,0cm     | 122,0 x 23,0 x 11cm       | 3,5cm        | 7,5cm           | 6kg                    | 5,5kg                     | -                   | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 30,87l  | -      |
| DC-1303214                  | 138,8 x 39,4 x 15,2cm     | 130,8 x 32,1 x 13,2cm     | 5cm          | 8,3cm           | 8,9kg                  | 8,5kg                     | -                   | -40/90°C       | IP 67          | Engineer Resin + Glass fiber      | 55,52l  | -      |
| <b>FIELD DESK</b>           |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-S0055                    | 192,0 x 50,0 x 72,5cm     | 64,0 x 53,0 x 72,5cm      | -            | -               | 35,58kg                | -                         | -                   | -10/90°C       | -              | Engineering PP + Stainless steel  | -       | -      |
| <b>Transport Boxes</b>      |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-T312824                  | 40,3 x 37,3 x 26,0cm      | 31,5 x 28,5 x 22,5cm      | 4,1cm        | 18,4cm          | -                      | 5,1kg                     | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 20,2l   | -      |
| DC-T392914                  | 47,8 x 37,8 x 17,3cm      | 39,0 x 29,0 x 14,5cm      | 5,4cm        | 9,2cm           | -                      | 4,1kg                     | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 16,4l   | -      |
| DC-T422815                  | 50,8 x 37,2 x 17,7cm      | 42,0 x 28,5 x 15,0cm      | 4,8cm        | 10,2cm          | -                      | 4,53kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 18,0l   | -      |
| DC-T493231                  | 58,0 x 41,0 x 35,0cm      | 49,2 x 32,2 x 31,5cm      | 4,1cm        | 27,4cm          | -                      | 7,22kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 49,9l   | -      |
| DC-T523622                  | 62,4 x 44,8 x 24,5cm      | 52,0 x 36,0 x 20,2cm      | 6,5cm        | 13,7cm          | -                      | 8,1kg                     | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 37,8l   | ✓      |
| DC-T534338                  | 61,8 x 51,8 x 41,0cm      | 53,0 x 43,0 x 36,9cm      | 10,3cm       | 26,6cm          | -                      | 10,1kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 84,1l   | -      |
| DC-T724832                  | 80,3 x 57,3 x 35,3cm      | 71,5 x 48,5 x 32,0cm      | 6,8cm        | 25,2cm          | -                      | 17,1kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 111l    | -      |
| DC-T735340                  | 81,8 x 61,8 x 44,5cm      | 73,1 x 53,1 x 40,4cm      | 5,8cm        | 34,6cm          | -                      | 25,2kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 156,8l  | -      |
| DC-T764646                  | 81,4 x 51,0 x 50,1cm      | 76,2 x 46,3 x 46,2cm      | 4,9cm        | 41,3cm          | -                      | 23kg                      | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 163l    | -      |
| DC-T796746                  | 87,8 x 75,8 x 50,0cm      | 79,0 x 67,0 x 45,8cm      | 9,2cm        | 36,6cm          | -                      | 26,1kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 242,4l  | -      |
| DC-T804633                  | 88,8 x 54,8 x 36,5cm      | 80,0 x 46,0 x 32,4cm      | 5,8cm        | 26,6cm          | -                      | 25kg                      | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 119,2l  | -      |
| DC-T1127254                 | 120,8 x 80,3 x 57,5cm     | 112,4 x 71,9 x 53,4cm     | 10,8cm       | 42,6cm          | -                      | 33,1kg                    | -                   | -40/90°C       | IP 67          | Poly Ethylene Plastic             | 431,6l  | -      |
| <b>DRY &amp; AMMO BOXES</b> |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-TB901                    | 37,0 x 21,0 x 23,5cm      | -                         | -            | -               | -                      | 1,25kg                    | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB901-L                  | 33,5 x 20,0 x 33,0cm      | -                         | -            | -               | -                      | 1,5kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB902                    | 61,5 x 29,0 x 20,0cm      | -                         | -            | -               | -                      | 2,55kg                    | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB903                    | 12,0 x 6,0 x 7,5cm        | -                         | -            | -               | -                      | 0,1kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB904                    | 19,0 x 19,0 x 11,5cm      | -                         | -            | -               | -                      | 0,45kg                    | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB905                    | 12,0 x 12,0 x 4,5cm       | -                         | -            | -               | -                      | 0,1kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB906                    | 12,0 x 12,0 x 3,5cm       | -                         | -            | -               | -                      | 0,1kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB907                    | 12,0 x 12,0 x 7,0cm       | -                         | -            | -               | -                      | 0,2kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB908                    | 15,5 x 8,0 x 8,0cm        | -                         | -            | -               | -                      | 0,2kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB909                    | 15,5 x 8,0 x 9,5cm        | -                         | -            | -               | -                      | 0,2kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB910                    | 35,0 x 20,0 x 34,0cm      | -                         | -            | -               | -                      | 1,9kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB910-S                  | 33,5 x 21,0 x 25,5cm      | -                         | -            | -               | -                      | 1,7kg                     | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB911                    | 34,3 x 19,5 x 14,0cm      | -                         | -            | -               | -                      | 0,62kg                    | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| DC-TB912                    | 22,1 x 13,5 x 12,0cm      | -                         | -            | -               | -                      | 0,38kg                    | -                   | -10/90°C       | -              | Engineering Polypropylene Plastic | -       | -      |
| <b>OTHERS</b>               |                           |                           |              |                 |                        |                           |                     |                |                |                                   |         |        |
| DC-LS01                     | 169,0 x 65,0 x 16,5cm     | -                         | -            | -               | 5,35kg                 | -                         | -                   | -              | -              | Bulletproof PC                    | -       | -      |
| DC-MS01                     | 105,0 x 58,0 x 16,5cm     | -                         | -            | -               | -                      | -                         | -                   | -              | -              | Bulletproof PC                    | -       | -      |
| DC-RS01                     | 54,0 x 54,0 x 16,5cm      | -                         | -            | -               | 1,85kg                 | -                         | -                   | -              | -              | Bulletproof PC                    | -       | -      |

# Testing



Waterproof test

Fighting against the test

The compressive test







Import and Service for Europe:  
ProStudio spol. s r.o.  
Havlíčková 7  
811 04 Bratislava  
Slovakia

Sale or distribution: